

FURUNO

WEATHER FAX

Weather Facsimile Receiver



Model:
FAX-410



Weather Facsimile Receiver

FAX-410

The FAX-410 is a marine weather facsimile receiver designed to receive and print high quality, high definition weather charts and satellite images, which are transmitted from onshore stations located around the world.

The FAX-410 can automatically select the receiving band depending on the quality of current signal reception. This enables the FAX-410 to receive the high quality weather charts and satellite images with little noise even under changing weather conditions. The receiving channels can be selected from the 314 channels in total, consisting of



- ▶ **Automatic channel selection by judging the quality of signal reception**
- ▶ **All known facsimile channels in 2-25 MHz bands are pre-programmed: 150 channels**
- ▶ **Additional memory capacity of 164 user-programmable channels available**

150 pre-programmed and 164 user-programmed channels. The FAX-410 can also be programmed for automatic, unattended operation by time or by WMO remote control signal. Up to 16 programs can be set per week for such an automatic operation.

The weather charts and satellite images are printed quietly on 10" wide thermal recording paper. The satellite images are printed with 9 gray levels (from black to white) to display highly defined images of clouds.

- ▶ **Full automatic operation by a built-in schedule timer (16 programs can be set per week for automatic operation)**
- ▶ **Quiet thermal printing due to minimal mechanical components**
- ▶ **10" wide thermal recording paper with clear and easy-to-watch weather charts and satellite images in nine gray levels**

Facsimile receiver gathers and generates crucial weather conditions at sea

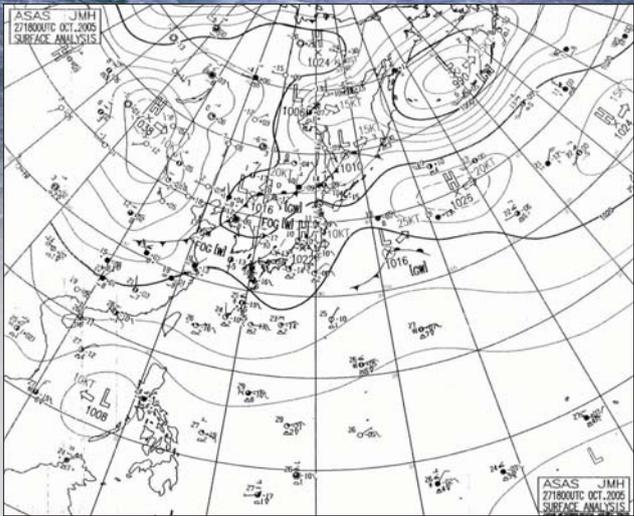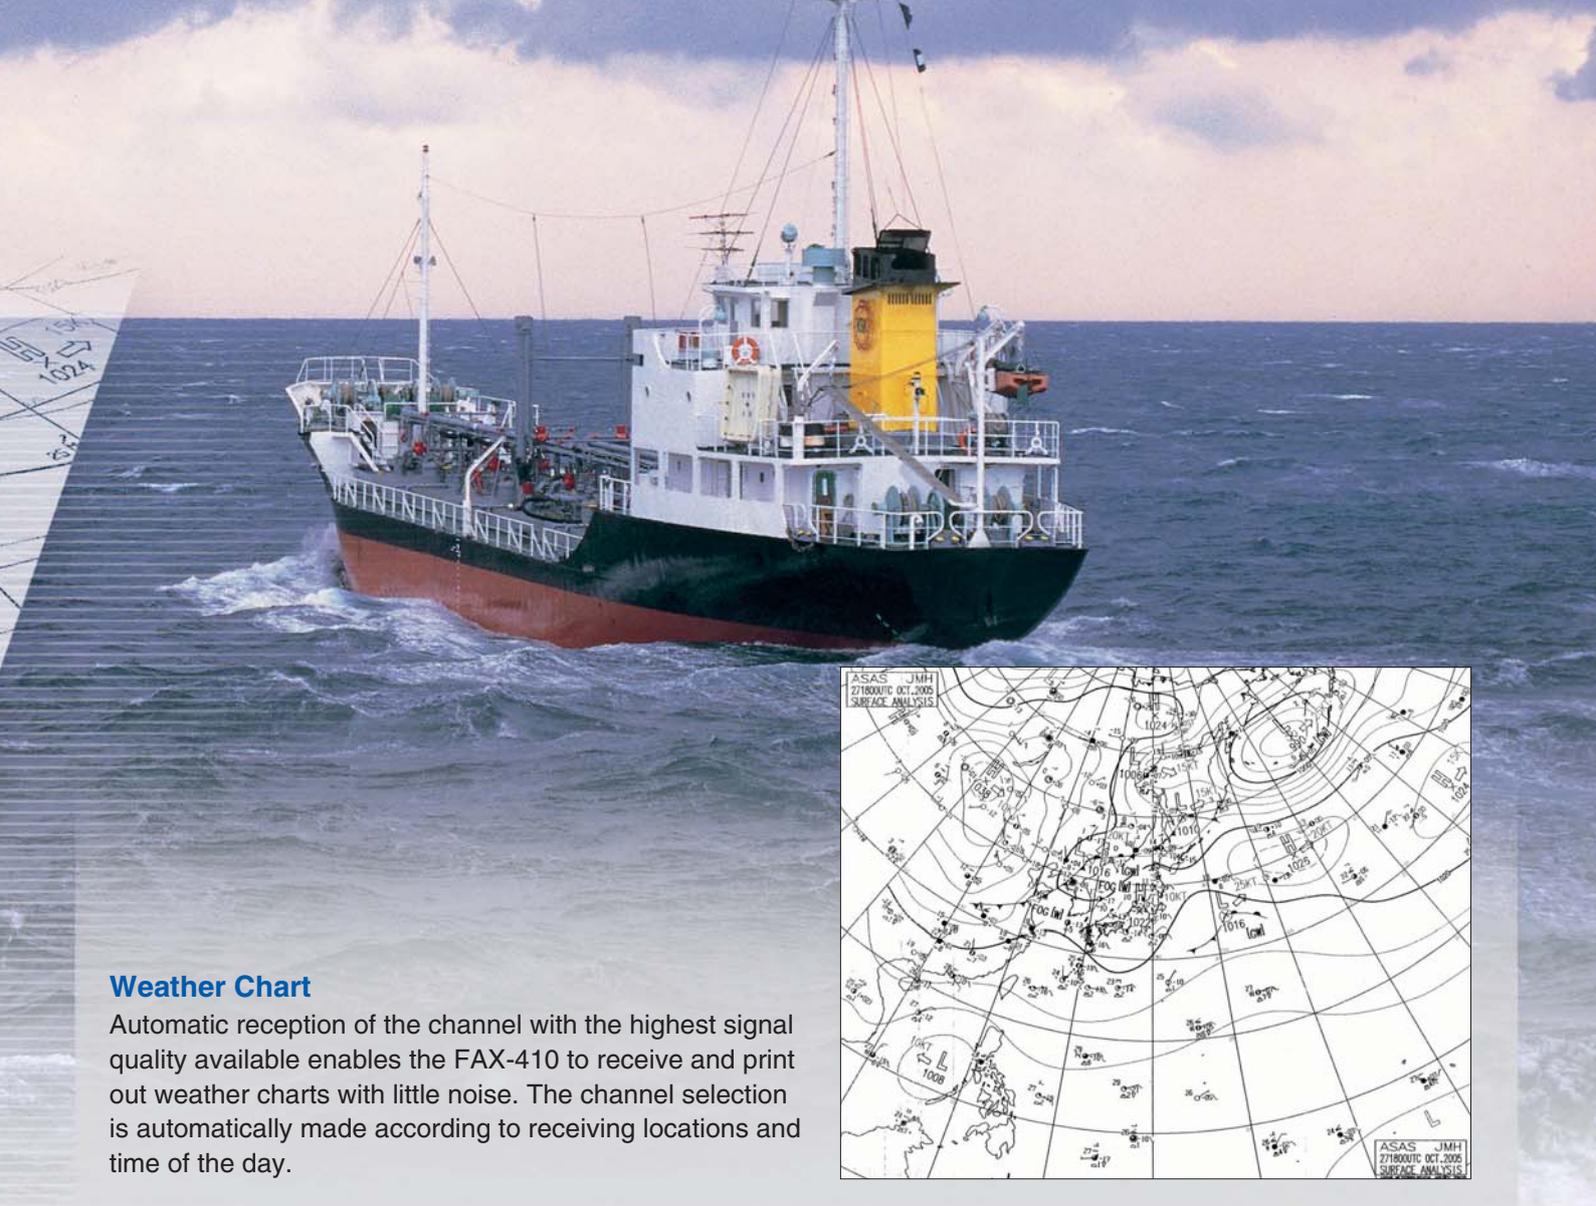

Weather Chart

Automatic reception of the channel with the highest signal quality available enables the FAX-410 to receive and print out weather charts with little noise. The channel selection is automatically made according to receiving locations and time of the day.

Front Panel

LCD
The LCD on the front panel can display two lines of 32 characters. 4 levels of backlight brightness of the LCD can be selected according to the lighting conditions of the bridge area simply by pressing DIM key.

Tuning Indicator 3 LEDs indicate the reception status illustrating whether the frequency is properly tuned or it should be moved up or down.



Synchronization Setting
When printed weather charts and satellite images glide to left or right, synchronization can be adjusted by a SYNC knob.

Keys
Operational setting can be configured with combinational use of operation keys and ten keys on the front panel. The following is the brief introduction to the operational setting of the FAX-410.

- PRG** Mode selection
- DIM** Backlight brightness setting
- SPD** Selection of scanning speed
- IOC** Switching of IOC
- FRQ** Switching to the frequency mode and frequency selection
- CH** Switching to the channel mode and channel selection
- REV** Reversing black-white in recording
- RCD** Start/stop recording

SPECIFICATIONS

PRODUCT NAME FACSIMILE RECEIVER

RECEIVER CHARACTERISTICS

Frequency Range 2-25 MHz in 100 Hz steps
 Number of Channels 150 pre-programmed channels and 164 channels for memory
 Receiving System Synthesized double super heterodyne
 Mode of Reception F3C
 Sensitivity Less than 2 V at 20 dB SINAD
 Tuning Monitor 3 LEDs indicate whether the frequency is properly received or that it should be moved up or down.

RECORDER CHARACTERISTICS

Recording System Thermal head printing. Thermal recording paper (257 mm x 30 m) with effective width of 252 mm
 Scanning Speed 60, 90 or 120 rpm
 I.O.C. 576 or 288
 Gradation 9 gradations
 Phase Control Automatic or manual
 External Input Signal Level 0 dBm at 600 ohms
 Operation Automatic or manual
 Automatic start/stop by W.M.O. remote control signal
 Schedule Timer: 16 programs/week

POWER SUPPLY (please specify when placing a purchase order)

AC model: 100/115/200/230 VAC: 0.3/0.26/0.15/0.13 A
 DC model: 12-24 VDC: 2.3-1.15 A

Environment

Temperature: -10C to +50C

EQUIPMENT LIST

Standard


- | | |
|--|--------|
| 1. Receiver Unit (1 roll of thermal paper inset) FAX-410 | 1 unit |
| 2. Installation Materials and Standard Spare Parts | 1 set |

Option

- Pre-amp unit FAX-5 with 1 m or 15 m cable
- Whip Antenna for FAX-5 04S4176
- Extension Kit for Antenna Cable OP04-2 10/20/30/40/50 m
- Whip Antenna FAW-6R2/FAW-6R2A (6 m)
- Junction Box ARD-1
- Recording Paper

Receiver Unit

FAX-410 7.4 kg 16.3 lb

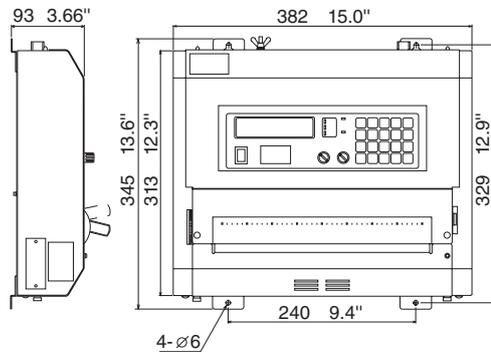


Preamp Unit (option)

FAX-5 1.3 kg 2.9 lb



INTERCONNECTION DIAGRAM

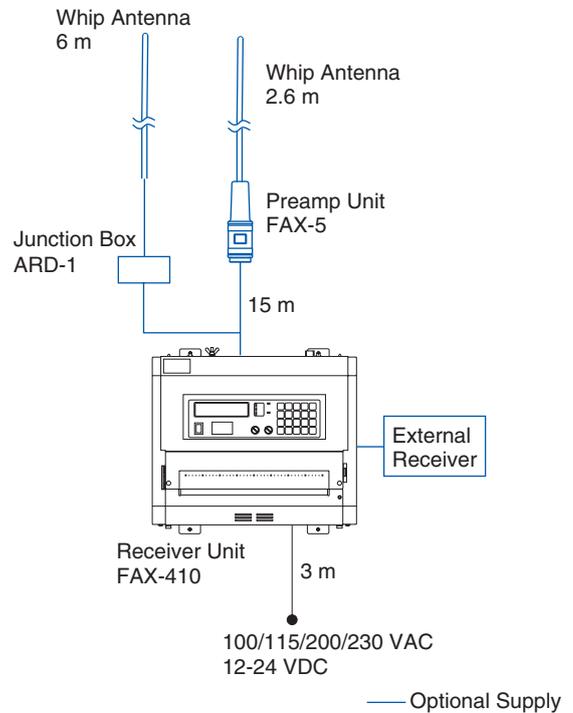

All brand and product names are registered trademarks, trademarks or service marks of their respective holders.
 SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

FURUNO ELECTRIC CO., LTD.
 Nishinomiya, Hyogo, Japan
www.furuno.com
FURUNO U.S.A., INC.
 Camas, Washington, U.S.A.
www.furunousa.com
FURUNO (UK) LIMITED
 Havant, Hampshire, U.K.
www.furuno.co.uk
FURUNO NORGE A/S
 Ålesund, Norway
www.furuno.no

FURUNO DANMARK A/S
 Hvidovre, Denmark
www.furuno.dk
FURUNO SVERIGE AB
 Västra Frölunda, Sweden
www.furuno.se
FURUNO FINLAND OY
 Espoo, Finland
www.furuno.fi
FURUNO POLSKA Sp. z o.o.
 Gdynia, Poland
www.furuno.pl

FURUNO DEUTSCHLAND GmbH
 Rellingen, Germany
www.furuno.de
FURUNO FRANCE S.A.S.
 Bordeaux-Mérignac, France
www.furuno.fr
FURUNO ESPAÑA S.A.
 Madrid, Spain
www.furuno.es
FURUNO ITALIA S.r.l.
 Genoa, Italy

FURUNO HELLAS S.A.
 Glyfada, Greece
www.furuno.gr
FURUNO (CYPRUS) LTD
 Limassol, Cyprus
www.furuno.com.cy
FURUNO EURUS LLC
 St. Petersburg, Russian Federation
www.furuno.com.ru
FURUNO SHANGHAI CO., LTD.
 Shanghai, China
www.furuno.com/cn

FURUNO KOREA CO., LTD.
 Busan, Korea
RICO (PTE) LTD
 Singapore
www.rico.com.sg

14073SK Printed in Japan
 Catalogue No. FX-620b