

## v60Ka 2 XCVR

### ENHANCED 65CM Maritime VSAT Antenna System



#### FEATURES

##### COMPACT AND LIGHTWEIGHT

The v60Ka 2 XCVR is a 60 cm compact and lightweight Ka-Band VSAT antenna system. The light weight of the antenna system (86 lbs/39 kg) provides an easy and convenient way to reduce installation time and cost. Despite being the smallest and lightest in Intellian VSAT, the v60Ka 2 XCVR is a top-notch performer even in the harshest sea conditions.

##### 2.5GHZ WIDE KA-BAND SUPPORT

The v60Ka 2 XCVR has a full range-optimized reflector and radome supporting high speed Ka-band services, which covers the entire commercial Ka 2.5GHz wide frequency band range. v60Ka 2 XCVR supports dual-polarization and can transmit and receive both LHCP and RHCP of Ka-band circular polarization.

##### HIGH POWER UPGRADABLE

The v60Ka 2 XCVR terminal use an integral unit of multi-band BUC and LNB arranged in a 4.5W Transceiver. The system with transceiver can use dual polarization for both Tx and Rx with several possible topologies. The v60Ka 2 XCVR can be easily upgraded with the 9W High Power transceiver. There is no need to replace the ACU and no additional components are required. Simply and easy upgrade 9W transceiver to benefit high throughput service.

##### EMBEDDED DUAL ANTENNA MEDIATOR

Intellian's new ACU fully supports dual antenna operation without additional complexity and components such as a separate mediator and RF splitters. To enable Dual Antenna operations, only three cables (two RF and one Ethernet) need to be connected between the two antennas. Streamlined configuration of the dual antenna operation is done via AptusNX.

##### QUICK & EASY INSTALLATION

The v60Ka 2 XCVR is designed to be easy to install and reduce costs for users. The system includes a single cable design, combining Tx, Rx and DC power into one single solution. The single coaxial cable is connected externally on the base of the radome with no requirement to access the inside of the radome, reducing complexity for the customer during installation and maintenance.

##### ANTENNA MANAGEMENT PLATFORM

Intellian's all new integrated M&C platform, AptusNX provides responsive web user interface to manage and control the antenna system regardless of device types. AptusNX includes an intelligent installation Wizard to simplify system configuration so that users can become connected faster than ever before. The platform also includes diagnosis function which enables accurate and enhanced antenna performance checks both on-board and remotely. This reduces the need for on-board maintenance and improves performance.


# v60Ka 2 XCVR

## TECHNICAL SPECIFICATIONS


### ABOVE DECK UNIT

Radome Height	93 cm / 36.6"
Radome Diameter	86.0 cm / 33.9"
Reflector Diameter	65 cm / 25.6"
Weight	39 kg / 86 lbs
Azimuth Range	Unlimited
Elevation Range	-20° to 115°
Cross-level Range	± 37°
Stabilization Accuracy	0.2° peak mispointing @max ship motion condition
Motor Brake System	Dynamic Brake System
Tx Frequency	27.5 ~ 30.0 GHz Ka-band
Tx Gain	44.2 dBi @29.0GHz
Rx Frequency	17.7 ~ 20.2 GHz Ka-band
Rx Gain	40.2 dBi @19.0GHz
G/T	> 15.5 dB/K @Elevation 10 degree
Transceiver Power	4.5W, 9W Transceiver
Tx Sidelobe	Meet FCC 25.218
Rx Sidelobe	Meet FCC 25.209
Polarization	Circular Dual Polarization (Rx : RHCP/LHCP, TX : RHCP/LHCP)
Antenna Cable	Single 50 ohm Coax Cable

## SYSTEM DIMENSION

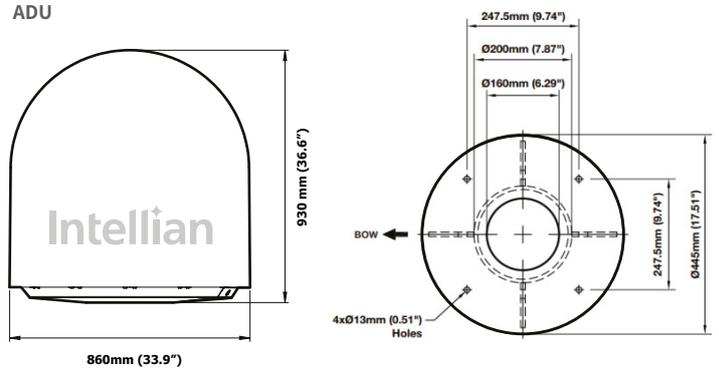


## SYSTEM DIAGRAM

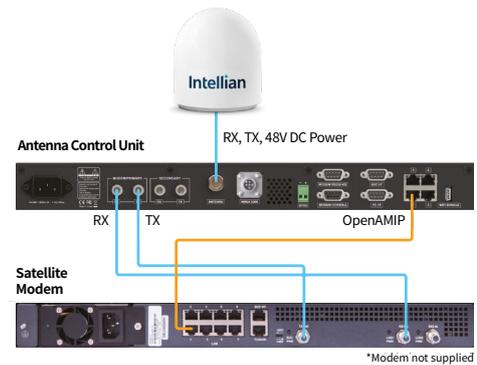

### ANTENNA CONTROL UNIT

Dimensions (WxDxH)	43.1 cm x 35.0 cm x 4.4 cm / 17" x 13.8" x 1.7"
Weight	5.2kg / 11.5lbs
Display	OLED Display
Gyrocompass Interface	NMEA 2000, NMEA 0183
Mediator Interface	YES
Modem Protocol	iDirect, Comtech, SatLink, Hughes, GILAT, Newtec
Wi-Fi Operation	Yes (w/ Wi-Fi dongle)
Management Port	Yes
Intellian LAN Port	Yes
Power Requirement	100 ~240 VAC, 50~60Hz, 3A

## SYSTEM DIAGRAM (DUAL ANTENNA)

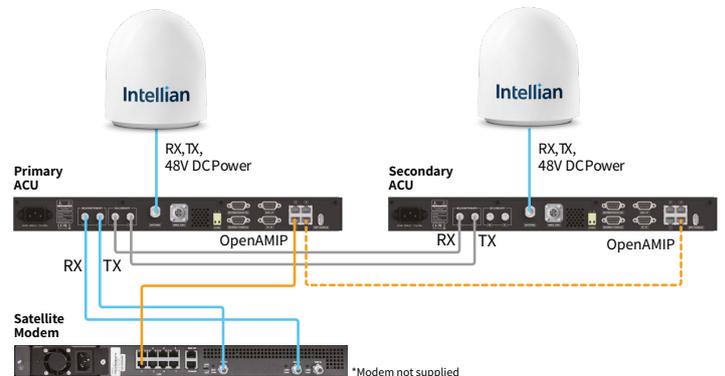

### Global HQ

Innovation Center  
 Intellian Technologies, Inc.  
 T +82 31 379 1000

### APAC

Seoul  
 Intellian Technologies, Inc.  
 T +82 2 511 2244

### Americas

Irvine  
 Intellian Technologies USA, Inc.  
 T +1 949 727 4498 Toll Free +1 888-201-9223

### EMEA

Rotterdam  
 Intellian B.V.  
 T +31 1 0820 8655