



SATELLITE PTT Radios



www.mackaycomm.com

+1 919 850 3100


satserv@mackaycomm.com

Satellite PTT, Voice & Data Equipment and Airtime



What is SATELLITE PTT?

The Icom IC-SAT100/M are the dedicated satellite push-to-talk (PTT) radios, and are the only PTT radios offering real-time communications at the push of a button between a group of individuals, each of whom can be anywhere on the planet*¹. The IC-SAT100/M use the Iridium® satellite communication network, which covers the entire globe, including both poles.

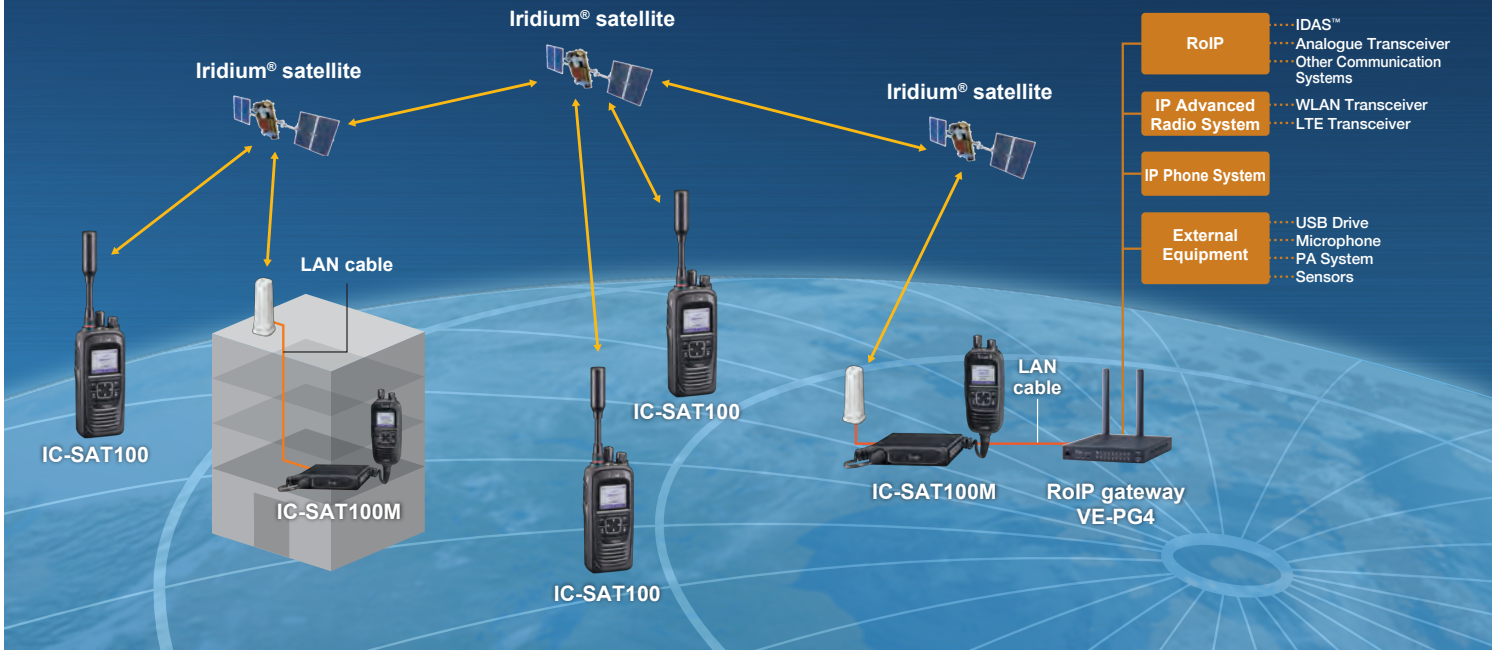


Main Features

One-to-Many Communication




IC-SAT100/M users can immediately start talking to all the radios in the same talkgroup, with just a push of the transmit (PTT) button.

Total Global Coverage, Including the Poles



The Iridium® satellite network covers the entire globe, including both poles, and can provide global communications anywhere on the planet*¹.

Real-Time Communication

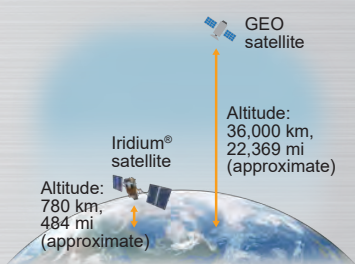

Using 66 Low Earth Orbit (LEO) Iridium® satellites, the IC-SAT100/M provides low-latency communication, and broader, more reliable network coverage, compared to Geosynchronous Equatorial Orbit (GEO) satellites.

Interoperability with Conventional Radios



With a VE-PG4 RoIP gateway, the IC-SAT100/M can interconnect with an IP phone, WLAN, LTE, IDAS digital*², analogue transceivers and other communication systems.

*¹ Subscription contracts are required for using the IC-SAT100/M. Depending on the country or region, carrying and/or use of the IC-SAT100/M may be prohibited.

*² Type-D multi-site trunking and conventional systems.

Compact Handheld Satellite PTT Radio

SATELLITE PTT

IC-SAT100

- IP67 waterproofing and dust-tight protection • 1500 mW of powerful audio
- 14.5 hours* of long lasting battery life • Emergency key on the top panel
- Short Data Message • Voice Recording function
- Built-in Bluetooth® capability • AES 256-bit encryption for security

And More

- Multiple language display (English, Chinese, French, Japanese, and Spanish)
- Integrated GPS receiver shows a received signal position information on the display
- SMA type antenna connector for an external antenna
- AquaQuake™ function clears any water ingress that may penetrate the speaker grill of the unit
- USB charging
- Tested to the MIL-STD-810 environmental tests

* TX : RX : standby = 5 : 5 : 90.




Supplied Accessories

- BP-300 Li-ion battery pack • BC-241 desktop charger • BC-242 AC adapter • FA-S102U antenna • MBB-5 belt clip

Optional Accessories (for the IC-SAT100)

Docking Station for In-Vehicle Use

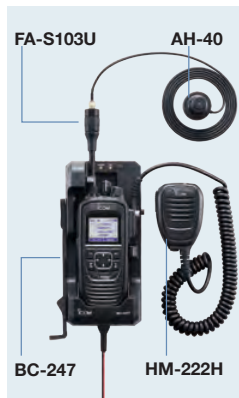

DOCKING STATION BC-247

Charger cradle for in-vehicle and in-building use. 12/24 V battery compatible.

ONE-TOUCH ANTENNA CONNECTOR

FA-S103U

Easily replace the antenna tip to an external antenna. (SMA to BNC)

EXTERNAL ANTENNA

AH-40

Magnet mount antenna with 1.5 m, 4.9 ft coaxial cable.

SPEAKER-MICROPHONE

HM-222H

Use the HM-222H (or an external headset) to transmit, while the radio is attached to the BC-247.


Active Antenna for In-Building Use



EXTERNAL ANTENNA AH-41

Maximum 169 m; 554.5 ft* coaxial cable for installing in a clear location to obtain a line-of-sight path to the satellite.

* Use optional OPC-2462 (59 m; 193.5 ft) or user supplied coaxial cable (Max. 169 m; 554.5 ft) to meet Iridium® performance requirements, and comply with FCC regulations.

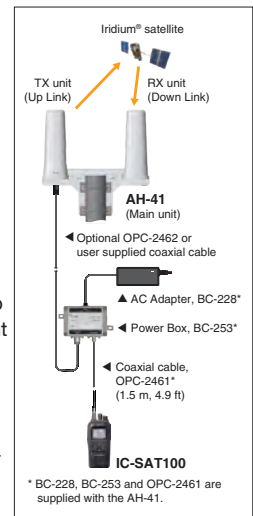

* BC-228, BC-253 and OPC-2461 are supplied with the AH-41.




HEADSET
VS-3
Bluetooth® headset



MULTI-CHARGER
BC-214N*
Charges up to six batteries (with/without transceivers) at the same time. (BC-157S, AC adapter supplied.)



COAXIAL CABLE
OPC-2422
Coaxial cable (5D-HFA) for the AH-40.
5 m, 16.4 ft



EXTERNAL ANTENNA
AH-38
Pole mount passive antenna. OPC-2113 coaxial cable separately required.



COAXIAL CABLE
OPC-2113
Coaxial cable (5D-HFA) for the AH-38.
10 m; 32.8 ft



COAXIAL CABLE
OPC-2462
Coaxial cable (5D-HFA) for the AH-41.
59 m; 193.5 ft




* The AD-140 charger adapters are supplied with the BC-214N, depending on the charger version.

For more optional accessories, check the Icom website:

In-Building and In-Vehicle Use

SATELLITE PTT

IC-SAT100M



- Install the antenna unit (with RF unit) to the rooftop, and use the radio from indoors, or even from the basement
- Easy wiring works between the antenna unit (with RF unit) and main unit using a LAN cable (Cat 5e)*1
- Compatible with both 13.2 and 26.4 V DC vehicle power source
- Antenna unit with RF unit: IP67, Main unit: IP54, Microphone: IP55
- 1500 mW powerful audio output

And More

- Voice Recording function
- Built-in Bluetooth® capability
- Multiple language display (English, Chinese, French, Japanese, and Spanish)
- Integrated GPS receiver shows received signal position
- Short Data Message
- AES 256-bit encryption for security
- Tested to the MIL-STD-810 environmental tests

*1 User supplied LAN cable is required to replace the supplied 20m LAN cable.

Package includes:

- Main unit
- Antenna unit with RF unit
- Multi-functional speaker-microphone
- OPC-2435 DC power cable
- OPC-2102 LAN cable (20 m, 65.6 ft)
- Mobile bracket for the main unit
- Antenna angle and mounting kits

IC-SAT100/M Short Data Message Applications for iOS™/Android™ devices



SHORT DATA MESSAGE APPLICATION

RS-SAT100

This application lets a user send and receive a short data message from a phone through the satellite. Use Bluetooth® connection between the radio and iOS™/Android™ device.

Features

- Easy texting similar to a chat or SNS application using a large display and keyboard on the iOS™/Android™ device
- Download free on App Store or Google Play™

Optional Accessories (for the IC-SAT100M)



EXTERNAL SPEAKER
SP-30



EXTERNAL SPEAKERS
SP-35 / SP-35L
SP-35: 2 m, 6.5 ft cable
SP-35L: 6 m, 19.6 ft cable



HEADSET
VS-3
Bluetooth® headset



AC ADAPTER
BC-157S
12 V/7.5 A output for use with the main unit.



ANTENNA
AH-40
Magnet mount antenna 1.5 m, 4.9 ft coaxial cable for in-vehicle use.



EXTENSION CABLE
OPC-2429
Extension cable for use with supplied speaker-microphone 2 m, 6.5 ft



COAXIAL CABLE
OPC-2422
Extension cable between the AH-40 and the radio. 5 m, 16.4 ft



For more optional accessories, check the Icom website:



IC-SAT100M Installation Examples

In-Building Use


You can flexibly install the radio and the antenna (with RF unit) with only a LAN cable (Maximum 100 m, 328 ft). Using PoE (Power over Ethernet) capability, the main unit supplies power to the antenna unit through the LAN cable. Connect your PoE injector or switch to extend the distance between the main unit and the antenna unit. (802.3at compatible)

* User supplied LAN cable is required to replace the supplied 20 m LAN cable.

Installation for Mobile Use

For a vehicle use, optional AH-40* must be used for optimal performance and environmental resilience. It must be placed on the top of the roof (highest point) with least sky blocking objects around it. When you use a third-party antenna cover, you can cover the AH-40 making it look more discreet.

* To install the AH-40, drilling a hole on the antenna unit (with RF unit) cover is required.

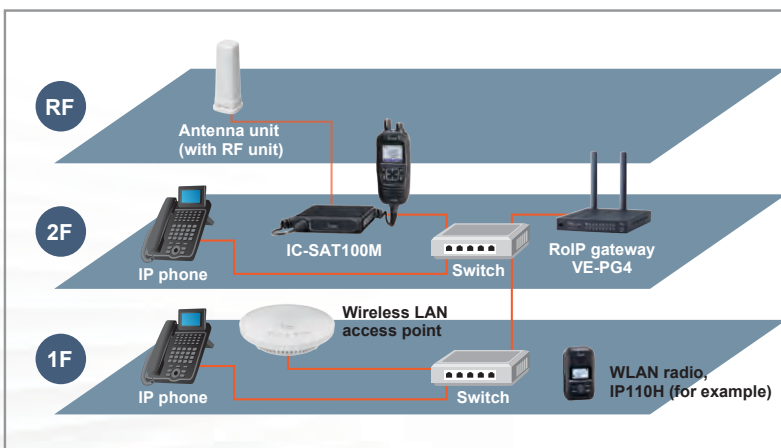

Advanced System Example with VE-PG4

The VE-PG4 is a versatile RoIP (Radio over IP) gateway unit, which seamlessly interconnects a satellite PTT radio with L MR radios, LTE radios, WLAN radios, IP phone systems, and external devices. In addition to the IP Network (LAN/WAN), the built-in LTE module* provides virtually nationwide communication coverage.

* Service availability depends on the country. Network coverage provided by a custom SIM card.



SATELLITE PTT Radios

		IC-SAT100	IC-SAT100M
Frequency range		1616 MHz to 1626.5 MHz	1616 MHz to 1626.5 MHz
Dimensions (W x H x D, projections not included)		57.8 x 135 x 32.8 mm, 2.3 x 5.3 x 1.3 in	Antenna with RF unit: 76.8 x 200 x 76.8 mm, 3 x 7.9 x 3 in Main unit: 125 x 29 x 156 mm, 4.9 x 1.1 x 6.1 in Microphone: 59.6 x 130.2 x 28.4 mm, 2.3 x 5.1 x 1.1 in
Weight (approximate)		360 g, 12.7 oz (with BP-300 and antenna)	Antenna unit with RF unit: 500 g, 1.1 lb Main unit with microphone: 1.2 kg, 2.6 lb
Operational temperature range		-30°C ~ +60°C, -22 °F ~ +140 °F	-30°C ~ +60°C, -22 °F ~ +140 °F
Audio output power	Internal speaker	1500 mW typical (at 5% distortion into an 8 Ω load)	1500 mW typical (at 5% distortion into an 8 Ω load)
	External speaker	1000 mW typical (at 5% distortion into an 8 Ω load)	4 W typical (at 5% distortion into a 4 Ω load)
Battery life (approximate)		14.5 hours (TX : RX : standby = 5 : 5 : 90)	-
Power supply voltage		7.5 V DC (with BP-300)	13.2 V / 26.4 V DC (10.5-32 V DC)
IP rating		IP67	IP67 (antenna with RF unit), IP55 (mic), IP54 (main unit)
Talkgroup		15 groups (maximum)	15 groups (maximum)
Antenna connector		SMA	SMA (for external antenna)
Power over Ethernet (PoE) Capability		-	IEEE802.3at compatible Powered Device : Max 25 W, Power Source Equipment: Max 30 W

Types of External Antennas for IC-SAT100 and Usage Guidelines

By replacing the IC-SAT100 antenna with an external antenna, satellite communication is possible even from a vehicle or building. Select the most suitable antenna according to the installation location and application.

- ※1 OPC-2422 coaxial cable (5 m, 16.4 ft) is required for more than 1.5 m, 4.9 ft extension.
- ※2 OPC-2113 coaxial cable (10 m, 32.8 ft) is required for AH-38 installation.
- ※3 Optional OPC-2462 or user supplied coaxial cable is separately required. Cable loss requirement is 12.5 - 13.0 dB loss at 1621 MHz.
- ※4 The distance from the main unit to the antenna is a rough guideline. The height of the building is an estimate assuming that the height of one floor is 3.5 m, 11.5 ft.



Q&A

What about communication fees?

- A.** Communication fees are typically charged at a flat rate through a monthly plan, and there are no additional call charges.* Communication fees differ, depending on the coverage area and the number of the IC-SAT100/M.
* Depending on the country or area, a flat charge plan may not apply, or the service may not be available.

Coverage Area

Size	Small	Medium	Large	Extra Large	Jumbo
Coverage area	100,000 km ² , 38,610 mi ² (radius 178 km, 111 mi)	300,000 km ² , 115,830 mi ² (radius 309 km, 192 mi)	750,000 km ² , 289,577 mi ² (radius 480 km, 298 mi)	1,500,000 km ² , 579,153 mi ² (radius 691 km, 429 mi)	2,250,000 km ² , 868,729 mi ² (radius 846 km, 526 mi)

What is a "Talkgroup"?

- A.** Using SATELLITE PTT, you can communicate with other IC-SAT100/M radios assigned to the same Talkgroup. The coverage area of the Talkgroup is selectable from five sizes (see the table above).

Can I use the IC-SAT100 in any location?

- A.** The IC-SAT100 can be used in open spaces, like the rooftop of a building. Receiving and transmitting may fail, depending on the satellite position or any obstacles between the radio and satellites. Your body can also be an obstacle. Hook the radio upright on your shoulder rather than on your waist.



*Ask your dealer for service plan details.

All stated features, appearances, screen shots and specifications may be subject to change without notice.

Icom and the Icom logo are registered trademarks of Icom Incorporated (Japan) in Japan, the United States, the United Kingdom, Germany, France, Spain, Russia, Australia, New Zealand and/or other countries. Iridium, and the Iridium connected logo are trademarks and registered trademarks of Iridium Satellite LLC. The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Icom Inc. is under license. Android and Google Play are trademarks of Google LLC. IOS is a trademark or registered trademark of Cisco in the U.S. and other countries and is used under license. IDAS and AQUAQUAKE are trademarks of Icom Incorporated. All other products or brands are registered trademarks or trademarks of their respective holders.

Icom Inc. 1-1-32, Kamiminami, Hirano-Ku, Osaka 547-0003, Japan Phone: +81 (06) 6793 5302 Fax: +81 (06) 6793 0013

www.icomjapan.com

Icom America Inc.
www.icomamerica.com

Icom (Europe) GmbH
www.icomeurope.com

Icom (Australia) Pty. Ltd.
www.icom.net.au

Your local distributor/dealer:

Icom Canada
www.icomcanada.com

Icom Spain S.L.
www.icomspain.com

Shanghai Icom Ltd.
www.bjicom.com



Mackay Marine, Global Commercial Sales
+1 281 479 1515 marinesales@mackaymarine.com
Mackay Communications, Satellite Solutions
+1 919 850 3100 satserv@mackaycomm.com
Mackay World Service (MWS) 24/7
+1 282 478 6245 service@mackaymarine.com

Icom Brazil
E-mail: sales@icombrasil.com

Icom (UK) Ltd.
www.icomuk.co.uk

Icom France s.a.s.
www.icom-france.com