

SABRE™ I

Satellite Broadband Communicator




The SABRE™ I brings high-speed office grade communications to your briefcase, anytime, anywhere. It is a simple to use, sub-laptop sized, fully self-contained satellite terminal. With the easy-to-carry SABRE™ I in your travel kit, you are always in touch. It was used successfully in the 2008 Brazilian election and the 2010 Philippines election.

FEATURES

- Simultaneous voice & data communications
- Data rate up to 384 kbps
- Built-in Ethernet and Analog Phone interfaces
- Supports voice, email, messaging, VPN, FTP, VoIP, FoIP and video media streaming
- Designed for non-technical user
 - Swiveled antenna mount facilitates easy pointing
 - Built-in menu driven graphical user interface for use without a laptop
 - Light weight, robust and reliable
 - Wide range of accessories that meet your needs
- Wi-Fi supported (by 3rd party external wireless router)

BGAN Coverage

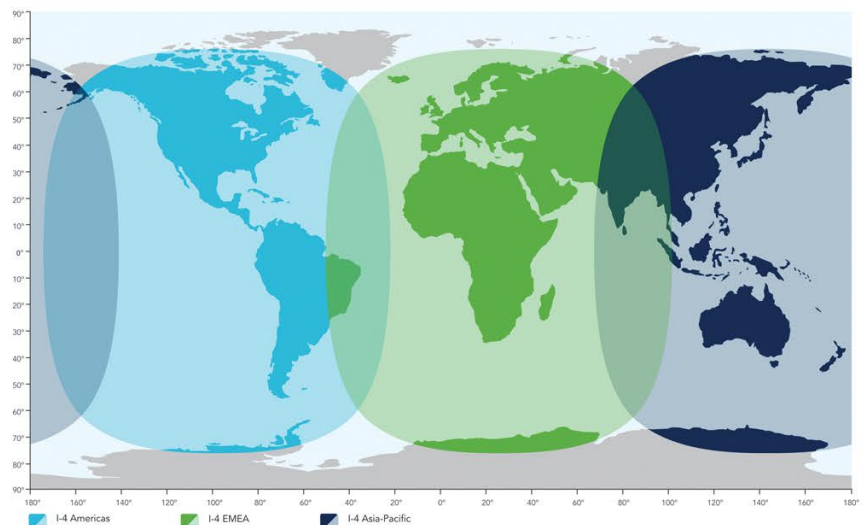

This map depicts Inmarsat's expectations of coverage post repositioning of its I-4 satellites. This map does not represent a guarantee of service. The availability of service at the edge of coverage areas fluctuates depending on various conditions.

New Generation Communications Network

The SABRE™ I enables personal broadband communications by connecting with Inmarsat's 3G compatible, Broadband Global Area Network (BGAN). BGAN is supported by the revolutionary new Inmarsat-4 satellite system.

Comprehensive Data and Voice Interfaces

The SABRE™ I comes with built-in Ethernet / LAN and RJ11 phone interfaces. You may connect two interfaces simultaneously.

With a 3rd party external Wi-Fi router, SABRE™ I is also capable of providing wireless access.

Successful large scale deployment and application

During the Brazilian election that was held in 2008, 1200 SABRE™ I were used simultaneously and they performed perfectly.

In the 2010 Philippines election, the first national electronic election in Philippines history, 5500 SABRE™ 1 were deployed across the country. It is the largest deployment of BGAN terminals in a single project with more than 1400 SABRE™ 1 transmitting simultaneously during the peak period.


Rugged and Easy to Use

The strong casing of the SABRE™ I allows it to withstand the toughest of environments and its swiveling hinge, makes positioning the SABRE™ I easy.

There are three ways to operate the SABRE™ I: the LCD panel on the terminal, BGAN LaunchPad or Web Console on a running laptop.

Best Value BGAN Terminal

The SABRE™ I is a robust, easy to use terminal offering flexible interface options. All packaged in a ready-to-go kit complete with adapters and power cords making SABRE™ I the best value BGAN terminal.

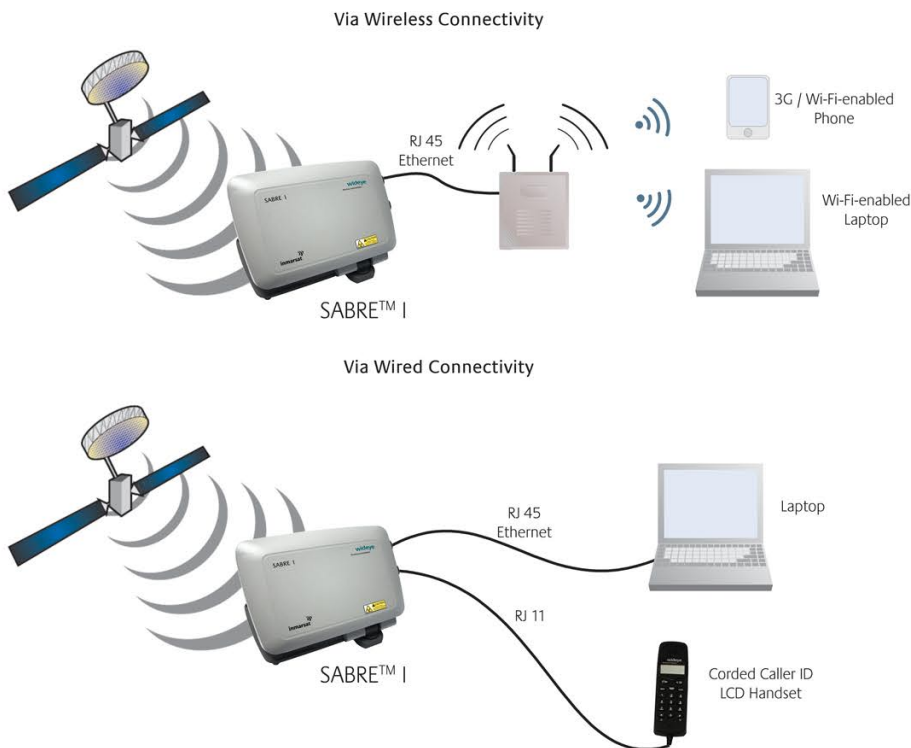

Contact Addvalue's authorized distributor



Mackay Communications, Inc.
 3691 Trust Drive Raleigh, NC 27616 USA
 Tel: 1-919-850-3100 Fax: 919-954-1707 US Toll: 1-877-4-MACKAY
 Email: satserv@mackaycomm.com www.mackaysatellite.com

Government buyers or contractors,
 contact Mackay Government at:
 government@mackaycomm.com
 or 904-880-4633



© 2012 Addvalue Communications Pte Ltd. All Rights Reserved. Addvalue Communications may have pending patent applications, trademarks or registered trademarks, copyrights, or other intellectual property rights covering subject matter in this document. The furnishing of this document does not give you any license to these intellectual properties.

This material may contain unintended errors or omissions and is subject to change without notice. It is provided as is and without any express or implied warranties, including merchantability, fitness for a particular purpose and non-infringement. Addvalue shall not be liable for any special, indirect, incidental or consequential damages as a result of its use.

Addvalue, the Addvalue Enabled logo, Wideye, the Wideye logo and Sabre are either trademarks or registered trademarks of Addvalue Communications Pte Ltd in Singapore and/or other countries. Inmarsat, the Inmarsat logo registered trademarks of Inmarsat Global Limited in the United Kingdom and/or other countries, and are used by Addvalue Communications Pte Ltd under license.

Technical Specifications

Frequency Band
 Receive: 1525MHz - 1559MHz
 Transmit: 1626.5MHz - 1660.5MHz

Antenna
 Type: Built-in patch antenna

Bearer Data Rate
 Receive: 384 kbps (Max)
 Transmit: 240 kbps (Max)

GPS Air Interface
 Integrated GPS receiver and antenna

Streaming IP
 32 kbps, 64 kbps

Ethernet / LAN
 1 x RJ45 Ethernet Port

Phone
 1 x RJ11 Analog Phone Port

Application Support
 VPN Client, VoIP, FoIP, MPEG Streaming, Email, Messaging, Conferencing, Web Browsing.

Operating System Support
 Microsoft Windows
 Mac OS 10.1 & above
 Redhat 6.0 & above

Environmental
 Operating Temp: -20°C to +60°C
 -4°F to 140°F
 Charging Temp: 0°C to +45°C
 +32°F to +113°F
 Operating Humidity: 95%
 (non-condensing at 40°C or +104°F)
 Storage Temp: -40°C to +80°C
 Storage Humidity: 5% to 95% (RH)
 Water & Dust: IP54

Battery
 Type: Lithium ion
 Transmit Time: 1 hour continuous transmission
 at data rate <= 72kbps
 Receive Time: 3 hour continuous receive
 without transmit requirement
 Standby Time: 12 hours (typical)

Electrical
 DC Input: 15 VDC (power adapter)
 12 ~ 28 VDC (car charger)

Power Consumption
 Idle: 4 W
 Receive: 6 W
 Transmit: 22 W

Power Adapter
 Input: 100 ~ 240 VAC, 47 ~ 63 Hz
 Output: 15 VDC

Weight
 1.65 Kg / 3.63 lbs

Dimensions
 259 x 195 x 58 mm
 10.10 x 7.67 x 2.28 in

Certificate of Compliance
 Inmarsat Type Approval
 CE
 FCC
 IC (Industry Canada)
 IDA
 GMPCS-MoU, ITU Registry
 RoHS
 IP54