

FURUNO



FleetBroadband

FELCOM250 / 500





FleetBroadband brings ship-to-shore/ship-to-ship operational and social communications to the broadband IP era

FELCOM250 and FELCOM500 are FURUNO' s new Inmarsat FleetBroadband terminals, which delivers ship-to-shore/ ship-to-ship broadband communication of up to 432 kbps together with voice communication all at the same time by utilising the latest generation Inmarsat I-4 satellites. FleetBroadband offers the data communication services with both shared bandwidth (Standard IP of up to 432 kbps) and dedicated data rate (Streaming IP of up to 256 kbps). On top of that, the users can make use of ISDN data service* as well as FAX communication.

FELCOM250 and FELCOM500 will bring cost-effective broadband communication onboard the vessels for a variety of needs, for both operational and social purposes, including calling their friends and family back home while at sea.

*available only for FELCOM500

FleetBroadband




Features of FELCOM250/FELCOM500

- ▶ A wide variety of maritime broadband communication services available
- ▶ Simultaneous access to voice and high-speed data communications
- ▶ Global coverage provided through three Inmarsat-4 satellites (except for polar regions)
- ▶ IP handset and IP-PBX incorporated
- ▶ Multiple IP handsets can be incorporated into the network by using the switching hub
- ▶ Wireless IP phones can be utilized (wireless LAN access points required)
- ▶ No dedicated software required for configuration setup (web server function incorporated)
- ▶ Simplified installation through a compact antenna unit with a diameter of around 60 cm, weighing around 20 kg (FELCOM500)
- ▶ Communication Unit supporting all major communication systems carrying ports to facilitate plug-and-play system integration
- ▶ Built-in NAT router facilitates smooth network integration to the Internet
- ▶ Incoming indicators available (optional supply)

FB-2000 Communication Unit

▼ Back

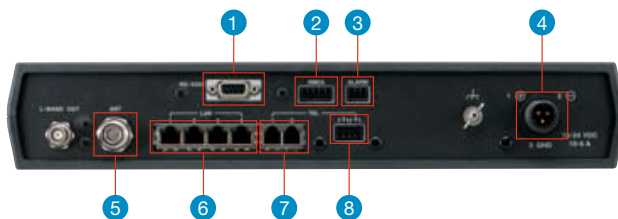

- 1 RS-232C 9pin D-Sub female connector for ISDN UDI/RDI (FELCOM500)
- 2 NMEA in/out Phoenix 5pin (NMEA 0183 Ver.2) for navigation equipment
- 3 Alarm output Phoenix 3pin for alarm equipment
- 4 For power supply
- 5 For Antenna Unit (Antenna cable length selectable 30m or 50m)

▼ Front




- 6 LAN RJ45 ports for IP handsets, PC/network equipment, telephone hub
- 7 Telephone RJ11 for telephones and facsimile
- 8 Telephone Phoenix 4pin for telephones and facsimile
- 9 USIM card slot

Comparison between Inmarsat FleetBroadband and Fleet Services

	FELCOM250	FELCOM500	FELCOM70
Data Communication			
Standard IP (Best effort delivery)	Up to 284 kbps	Up to 432 kbps	MPDS up to 64 kbps
Streaming IP (Guaranteed data rate)	8, 16, 32, 64, 128 kbps	8, 16, 32, 64, 128, 256 kbps	N/A
ISDN	N/A	64/56 kbps	64/56 kbps
Voice	4 kbps AMBE+2/3.1 kHz audio Simultaneously usable with packet data and IP services		4.8 kbps AMBE/3.1 kHz audio NOT simultaneously usable with data service
FAX*	Group 3 FAX via 3.1 kHz audio		9.6 kbps (Group 3), 64 kbps (Group 4)
SMS	Standard 3G (up to 160 characters)		N/A


*minimum elevation angle of 20 degrees towards satellite is required for use of FAX application with FELCOM250.

FleetBroadband coverage

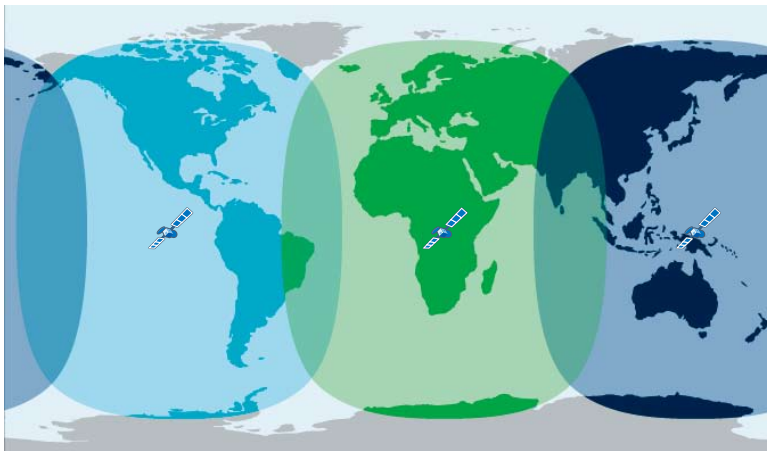

- I4 satellite F1 PAC-W 143.5E:
Covering Oceania, Western Pacific and South and East Asia
- I4 satellite F2 IND-W 25E:
Covering Western Asia, Africa and Eastern Atlantic
- I4 satellite F3 PAC-E 98W:
Covering Western Atlantic, Eastern Pacific and Americas

System Overview of FleetBroadband

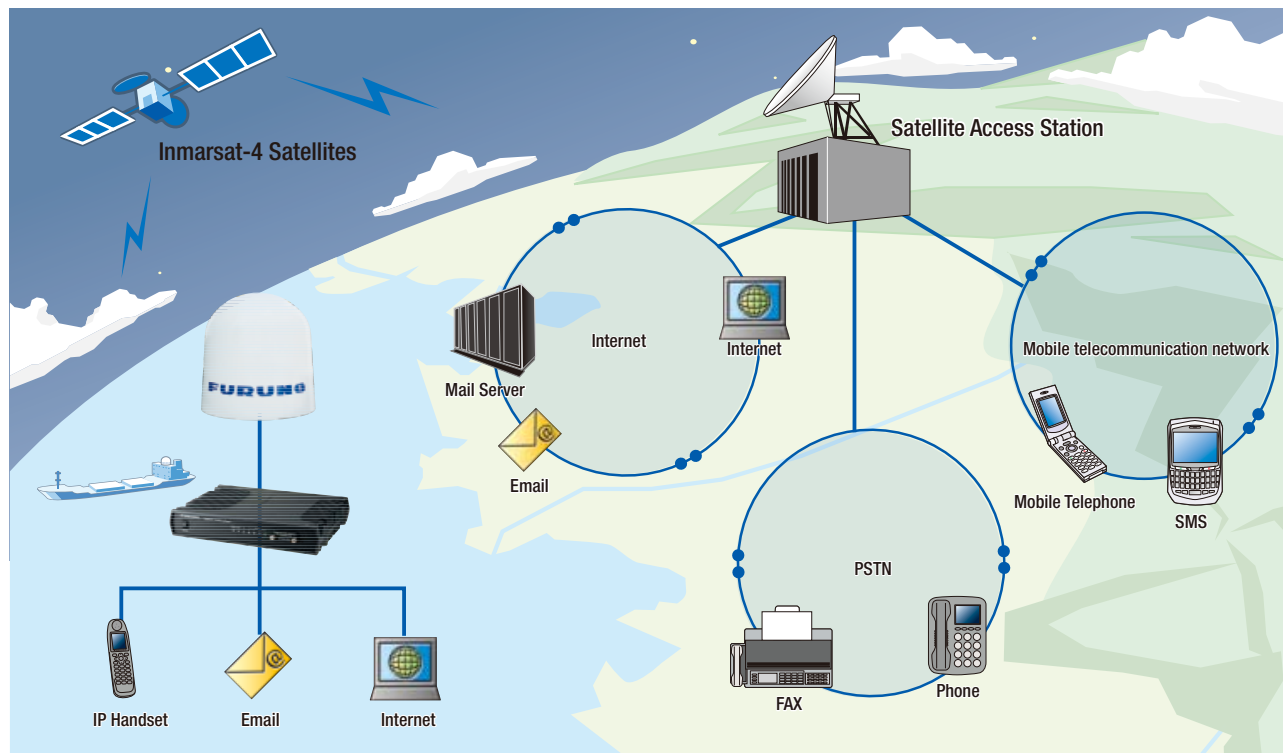

Features of Inmarsat FleetBroadband service applications

▶ Selectable data rates for data communications according to needs:

Standard IP:

- Service providing best effort delivery of 432 kbps (FELCOM500, 284 kbps for FELCOM250) (connected through shared connection pipe: less traffic—higher throughput, and more traffic—lower throughput)
- Data service charged for data sent and received
- Suitable for typical office applications such as e-mail, web browsing, FTP, etc.

Streaming IP:

- Guaranteed streaming data rates on demand, rates selectable from 8, 16, 32, 64, 128 or 256 kbps (no contention amongst those who are connected in the same network—guaranteed throughput at all times)
- Suitable for bandwidth-hungry large data transfer, i.e., streaming video and audio, etc.
- Service charged for the duration of the connection to the network
- These dedicated streaming channels can run independently while the standard IP service is running in the background, meaning that a host of applications can be running simultaneously

▶ Crystal clear voice telephony

- 4 kbps cost-effective, landline quality speech available
- Supports one circuit switched service at any one time
- Simultaneous use together with data communications


▶ High stability in communication links achieves constant network availability even under harsh environmental conditions

▶ Supports additional core voice and ISDN data capabilities for integration with legacy applications

- ISDN compatibility available on FELCOM500

▶ SMS (up to 160 characters)

FleetBroadband System Configuration

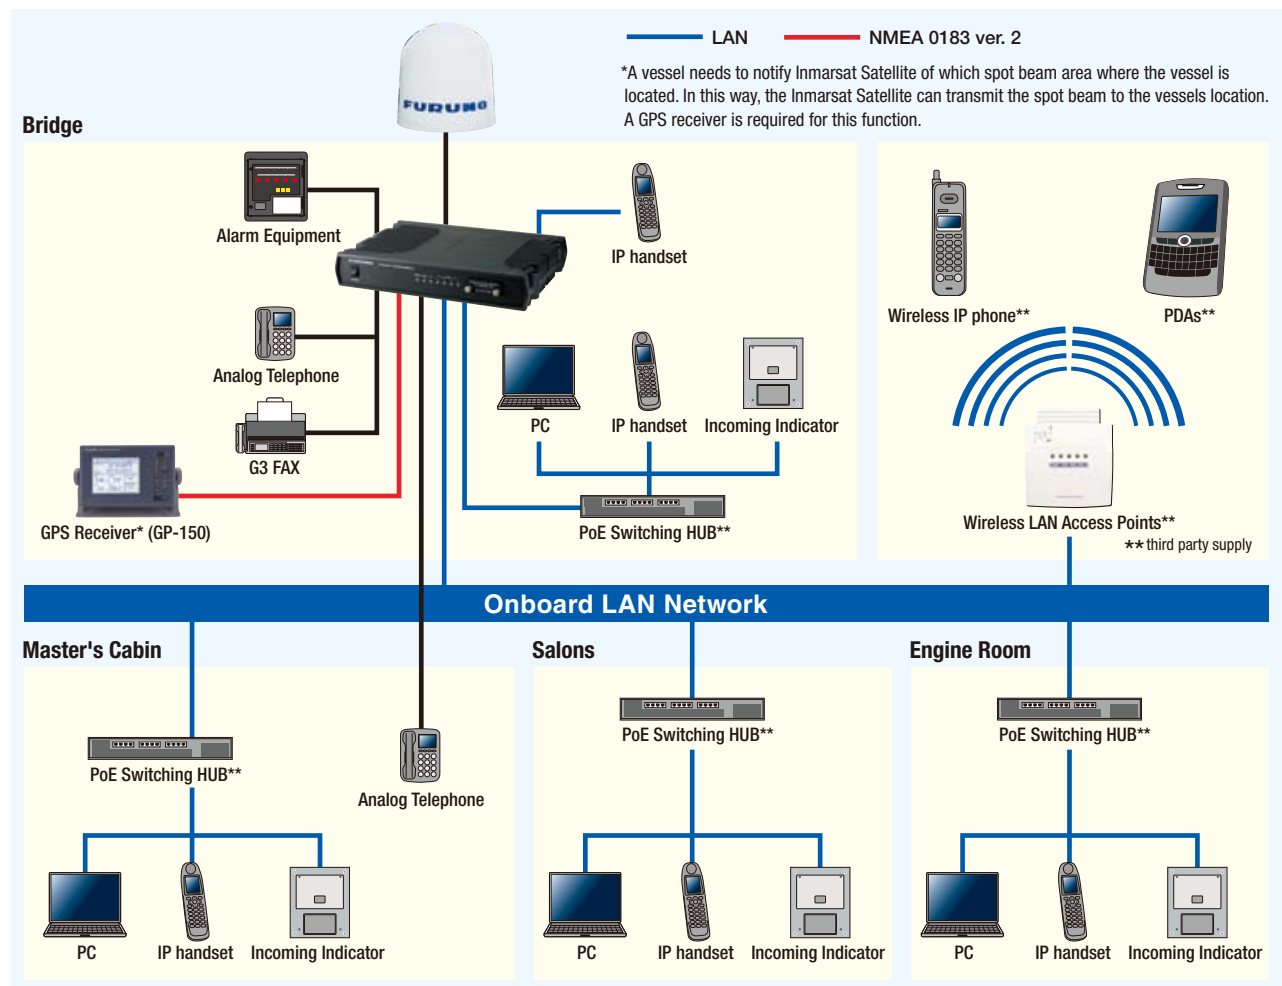

User Applications of **inmarsat**
FleetBroadband

With its simultaneous voice and data capability, FELCOM250 and FELCOM500 can support an extensive range of user applications. All tasks can be conducted all at the same time through a single terminal.

NB., Certain network devices must be arranged locally, in order for you to make use of some of the applications.



Social communication and increased welfare for crewmembers

Crewmembers are now able to send SMS or make private phone calls to their friends and families back home. They can also browse the web to read news from home, football results or any other news of their interests.



Troubleshooting in case of equipment failure

In case of failure of engine or other onboard equipment, chief engineers onboard can set up live, on-the-spot remote condition-review and troubleshooting sessions with service engineers from various manufacturers onshore. A reliable high bandwidth connection is essential for enabling these functions, and FleetBroadband provides a perfect solution.



Educational possibility for crewmembers using distance learning

Using their off-duty time in a more productive manner has become very popular amongst navigators. FleetBroadband allows crewmembers to attend off-campus distance learning courses through IP applications to further enhance their skills and academic levels while off-duty.

Specifications of INMARSAT FLEETBROADBAND FELCOM250/FELCOM500

Product Name		Inmarsat FleetBroadband	
Model		FELCOM250	FELCOM500
Antenna Unit		FB-1250	FB-1500
Transmitting Frequency		1626.5 - 1660.5 MHz	
Receiving Frequency		1525.0 - 1559.0 MHz	
Environment			
Temperature	operative temperature	-25°C - +55°C	
	storage temperature	+70°C	
Waterproofing		IP56	
Ship's motion	Roll	± 30°/8 sec	
	Pitch	± 10°/6 sec	
	Yaw	± 8°/50 sec	
	Rate of Turn	± 6°/1 sec	
	Ship's Speed	30 knot	
Communication Unit		FB-2000	
Interface			
Ethernet	RJ45	4 ports	
2-wire analog telephone	RJ11	2 ports	
	Phoenix 4 pin	2 ports	
NMEA in/out	Phoenix 5 pin (NMEA0183 ver. 2)	1 port	
Alarm output	Phoenix 3 pin Contact (Normal Close)	1 port	
USIM/SIM	Plug in type	1 port	
RS-232	9 pin D-Sub female connector (EIA574)	1 port	
L-band output	BNC	1 port	
Environment			
Operative temperature		-25°C - +55°C	
Communication Services			
Voice		4 kbps circuit switched (AMBE+2 codec) ISDN 3.1 kHz Audio (Transparent)	
Data	ISDN UDI/RDI	N/A	56/64 kbps
	Standard IP (Best Effort Delivery)	284 kbps (RX), 225 kbps (TX)	432 kbps (RX), 372 kbps (TX)
	Streaming IP (Guaranteed Service Rate)	8, 16, 32, 64, 128 kbps	8, 16, 32, 64, 128, 256 kbps
SMS (Short Message Service)		Up to 160 characters	
FAX		G3 Fax through 3.1 kHz audio	
POWER SUPPLY			
Power Supply		10.8 - 31.2 VDC	
FUSE		12 A (TX) at 12 VDC, 6 A (TX) at 24 VDC	

EQUIPMENT LIST


Model		FELCOM250	FELCOM500
Standard			
Above Deck Unit			
Antenna Unit		FB-1250	FB-1500
Below Deck Unit			
Communication Unit		FB-2000	
IP Handset		FB-8000	
Option			
Incoming Indicator		FB-3000	
Analog Telephone		FC755D1	
G3 FAX		FAX-2810/2820	
AC/DC Power Supply Unit		PR-240	

Below Deck Unit FELCOM250/500

Communication Unit FB-2000
4.1 kg 9 lb


IP Handset FB-8000
0.38 kg 0.83 lb

Incoming Indicator FB-3000
0.37 kg 0.81 lb

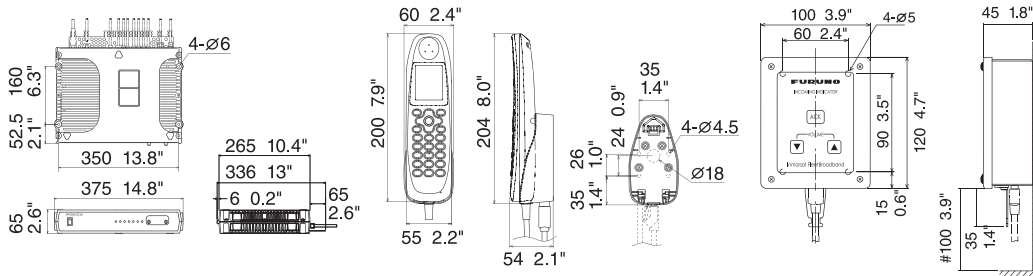


Above Deck Unit FELCOM250

Antenna FB-1250
6.5 kg 14.3 lb

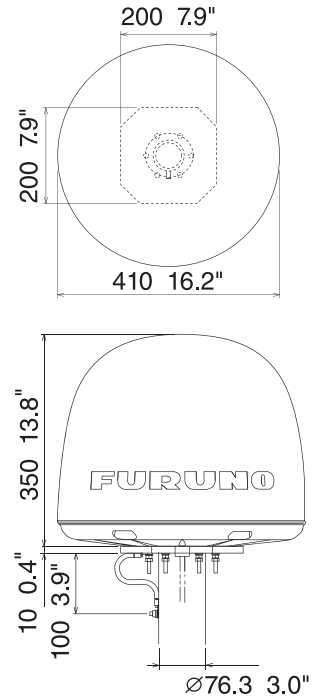

FELCOM500

Antenna FB-1500 (with an attachment)
21 kg 46.3 lb

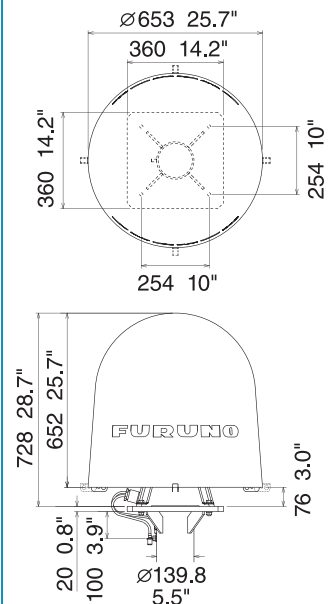



FURUNODEEPSEA.com

Where to buy:



www.mackaysatellite.com

Mackay Communications

919-850-3100

satserv@mackaycomm.com

Mackay Marine

281-479-1515

marinesales@mackaycomm.com

Mackay Govt. Group

904-880-4633

government@mackaycomm.com

All brand and product names are registered trademarks, trademarks or service marks of their respective holders.
SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

FURUNO ELECTRIC CO., LTD.

Nishinomiya, Hyogo, Japan
www.furuno.co.jp

FURUNO U.S.A., INC.

Camas, Washington, U.S.A.
www.furunousa.com

FURUNO (UK) LIMITED

Havant, Hampshire, U.K.
www.furuno.co.uk

FURUNO FRANCE S.A.S.

Bordeaux-Mérignac, France
www.furuno.fr

FURUNO DANMARK AS

Hvidovre, Denmark
www.furuno.dk

FURUNO NORGE A/S

Ålesund, Norway
www.furuno.no

FURUNO ESPAÑA S.A.

Madrid, Spain
www.furuno.es

FURUNO SVERIGE AB

Västra Frölunda, Sweden
www.furuno.se

FURUNO FINLAND OY

Espoo, Finland
www.furuno.fi

FURUNO POLSKA Z o.o.

Gdynia, Poland
www.furuno.pl

FURUNO EURUS LLC

St. Petersburg, Russian Federation
www.furuno.com.ru

FURUNO HELLAS S.A.

Piraeus, Greece

FURUNO DEUTSCHLAND GmbH

Rellingen, Germany
www.furuno.de

FURUNO BROADBAND SERVICE

CENTER

Hvidovre, Denmark
www.safecomnet.com

RICO (PTE) LTD

Singapore
www.rico.com.sg



1009-PDF Printed in Japan
Catalogue No. W-3254f