



## HARDWARE


KVH INDUSTRIES  
**MINI-VSAT**  
BROADBAND™

# TracPhone V11IP

## One antenna, global coverage

The 3-axis, gyro-stabilized TracPhone® V11IP dual-mode onboard terminal uses a single, small, 1.1-meter antenna to seamlessly access both the C- and Ku-band satellites of the mini-VSAT Broadband™ network for fully global coverage. Unlike competing L-band and Ku-band solutions that require two terminals joined with a router, the TracPhone V11IP is a unified solution: one antenna seamlessly providing both C- and Ku-band services and integrated to one streamlined belowdecks unit.

- 1 Unified C/Ku-band RF system provides dual-mode capability from one compact antenna
- 2 Highly tuned carbon-fiber dish paired with a custom LNB using KVH's exclusive RingFire™ technology ensures superior reception
- 3 Advanced modular antenna controller for high-speed tracking
- 4 Three-axis pedestal design with a 4<sup>th</sup> axis of automatic skew adjustment seeks the optimal satellite in the mini-VSAT Broadband network and tracks satellites directly overhead at the equator and low on the horizon at polar latitudes
- 5 Robotic, direct-drive, beltless motion control

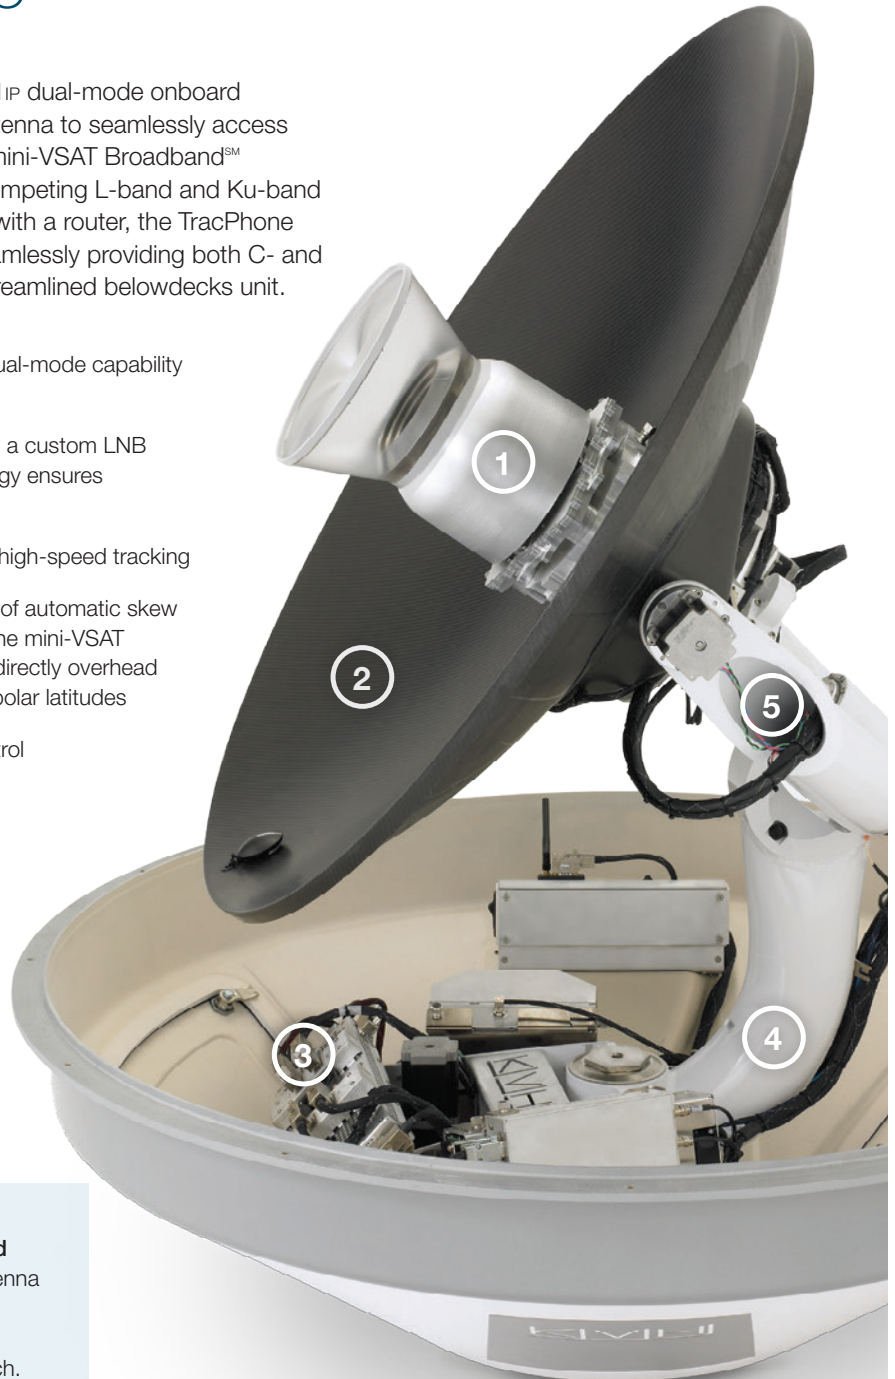

All VIP-series products include KVH's **Integrated CommBox Modem (ICM)** with IP-enabled antenna control unit, CommBox™ Network Manager, ArcLight® spread spectrum modem, Voice over IP adapter, and built-in Wi-Fi and Ethernet switch. Systems also feature a browser-based user interface and convenient iPhone® app for system status, updates, and support.

# TracPhone V11IP with mini-VSAT Broadband Service

## System Specifications


Service	
Network	mini-VSAT Broadband
Antenna Type	Dual-mode C/Ku-band
Service Coverage Area	Global except Arctic Regions
Maximum Speed Download/Upload <sup>1</sup>	4 Mbps/1 Mbps
Abovedecks Equipment	
Antenna Dish Diameter	1.1 m (42.5")
Antenna Unit Dimensions/Weight	1.2 m D x 1.4 m h (48.8" D x 57.3" h)/109 kg (240 lbs)
Elevation/Azimuth Range	-24° to +119°/720° rotation
Temperature	Operating: -30°C to 55°C (-22°F to 131°F) Survival: -30°C to 70°C (-22°F to 158°F)
Humidity	IEC 60945; 40°C (104°F), 95% Humidity (non-condensing)
Rain	Precipitation rate of 1.7mm/min, w/wind speeds up to 100 knots
Heading Input	NMEA 0183 magnetic or true heading
Antenna Unit Power	100-240 VAC, 50-60 Hz auto switching, 650W max; provided at the dome
ICM to Antenna Unit Communications	16 Conductor Data Cable
L-band RF Cables (customer supplied)	75 Ohm – F-Connector terminations; For 5.8-30.5 m (16-98 ft.) choose LMR-400-75 For >30.5-91.4 m (98-295 ft.) choose LMR-600-75
Remote Support	Integrated GPRS modem for access by KVH technical support
Belowdecks Equipment – Integrated CommBox Modem (ICM)	
Dimensions	42.6 cm l x 41.4 cm w x 2U h (16.8" x 16.3" x 2U) rack-mountable with optional mounting provisions <sup>2</sup>
Weight	5.1 kg (11.25 lbs)
Temperature	Operating: -15°C to 55°C (5°F to 131°F); Survival: -15°C to 70°C (5°F to 158°F)
Input Power	100-240 VAC, 50-60 Hz auto switching, 250W max
Data Interfaces	4 Ethernet: IEEE 802.3 10BASE-T/100BASE-TX, 100 Mbps; 1 Wi-Fi 802.11; 3 USB ports
Voice Interfaces	2 RJ11 ports for VoIP services
System Options	
CommBox Software Bundles Available	Standard or Enterprise Bundles - see "Featured Options" at kvh.com/v11ip for details
Built-in Crew Calling Gateway	Available; contact Airtime Services for details
IP-MobileCast™ Services	Available; see minivsat.com/one for commercial applications and minivsat.com/vipyachts for leisure applications
UCH-250 Fax Server	For enterprise-grade faxing over IP (Part Number 19-0520); contact KVH for details
KVH OneCare™ Support Program	Available; see kvh.com/onecare for details
Iridium Pilot® Secondary System	Available (Part Number 72-0537-01); see "Featured Options" at kvh.com/v11ip for details
Complete System	
Certification	Complies with the specifications of EC directive 1999/5/EC Radio & Telecommunications Terminal Equipment (R&TTE), per compliance with EC directive 2006/95/EC, EMC directive 2004/108/EC and IEC 301-427
System Warranty <sup>3</sup>	Comprehensive 2-year parts, 2-year labor warranty supported by KVH's worldwide Certified Support Network (CSN)
Part Number/MSRP (USD)	01-0350-11/\$74,995

Meets FCC and CE requirements. Exceeds Inmarsat operational, survival, and shock specifications.

<sup>1</sup>Published data speeds are maximum speeds and may vary in different regions and under different conditions.

<sup>2</sup>Optional Belowdecks Mounting Case (Part Number 72-0368) available for vessels without a rack.

<sup>3</sup>Unless subject to in-country regulations. Restrictions apply. Visit [www.kvh.com/warranty](http://www.kvh.com/warranty) for details.

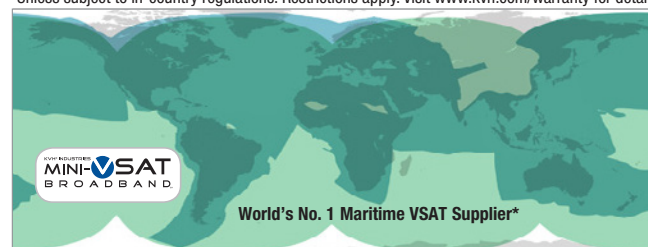

## mini-VSAT Broadband C/Ku-band Coverage

Coverage maps are representative and may change at any time. Data rates may also vary in different regions. For complete details, choose "TracPhone" at [www.kvh.com/footprints](http://www.kvh.com/footprints) and click on the mini-VSAT Broadband coverage map. KVH provides no guarantees of satellite coverage or availability.


- Ku-band Coverage with C-band Overlay Coverage
- Ku-band Coverage
- C-band Coverage

## System Diagram



### Integrated CommBox Modem (ICM) –

Streamlined belowdecks unit includes: IP-enabled antenna control unit, built-in CommBox Ship/Shore Network Manager, ArcLight spread spectrum modem, Voice over IP adapter, and built-in Wi-Fi and Ethernet switch.

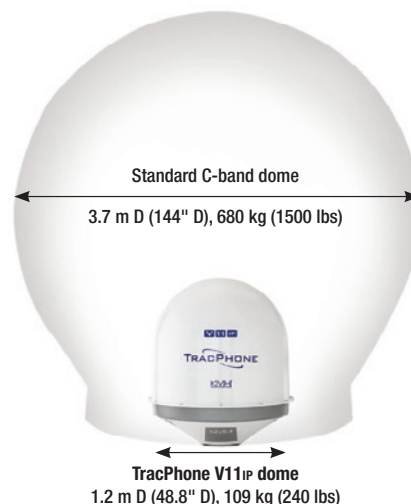

85% smaller in volume and lighter than standard C-band antennas, TracPhone V11IP is faster, easier, and less expensive to install.

\*KVH is the world's No. 1 maritime VSAT supplier as measured by vessels equipped with mini-VSAT Broadband service, according to NSR's Maritime SATCOM Markets, 4th Edition, June 2016, and the COMSYS Maritime VSAT Report, 4th Edition, March 2015.



**Where to buy:**  
**Mackay Communications**  
 Mackay Satellite  
 919-850-3100 [satserv@mackaycomm.com](mailto:satserv@mackaycomm.com)  
**Mackay Marine**  
 281-479-1515 [marinesales@mackaycomm.com](mailto:marinesales@mackaycomm.com)  
**Mackay Govt. Group**  
 904-880-4633 [government@mackaycomm.com](mailto:government@mackaycomm.com)

**KVH Industries A/S**  
 EMEA Headquarters  
 Kokkedal, Denmark  
 Tel: +45.45.160.180 Fax: +45.45.160.181  
 Email: [info@emea.kvh.com](mailto:info@emea.kvh.com)

**KVH Industries, Inc.**  
 World Headquarters  
 Middletown, RI U.S.A.  
 Tel: +1.401.847.3327 Fax: +1.401.849.0045  
 Email: [info@kvh.com](mailto:info@kvh.com)

**KVH Industries Pte Ltd.**  
 Asia-Pacific Headquarters  
 Singapore  
 Tel: +65.6513.0290 Fax: +65.6472.3469  
 Email: [info@apac.kvh.com](mailto:info@apac.kvh.com)

©2013–2017 KVH Industries, Inc.

Patents Pending

Specifications subject to change without notice

KVH, TracPhone, RingFire, IP-MobileCast, CommBox, KVH OneCare, and the unique light-colored dome with dark contrasting baseplate are trademarks of KVH Industries, Inc. iPhone is a registered trademark of Apple Inc. "mini-VSAT Broadband" is a service mark of KVH Industries, Inc. All other trademarks are the property of their respective companies.