

New!

VAF

INSTRUMENTS



ProFlow

Sliding Vane Meters DN 15-50 (½" - 2")

142

Product Bulletin

WWW.VAF.NL

TO BE
REALLY
SURE

Introduction

VAF Instruments ProFlow positive displacement sliding vane type liquid flowmeters are used in continuous metering applications of oil-like liquids, especially for accurate measurement of fuel oil consumption. ProFlow flowmeters have a simple, rugged design. With only few almost frictionless moving internal parts there is hardly any wear in the flowmeter which safeguards a typical long lasting lifetime. ProFlow meters have no mechanical seals saving you from regular maintenance and possible leakage of process liquids into the environment. The flowmeter is driven by the process liquid which makes it suitable for distant locations without power supply. The high accuracy of the flowmeter (down to 0.2% and repeatability 0.05%) is not influenced by process pressure or temperature, mechanical pipe strain or liquid turbulence and therefore straight inlet and outlet pipe pieces are not required.

Experience in flow measurement

In 1938 VAF Instruments started as a manufacturer of petrol delivery pumps. The flowmeters made by VAF for this pump already had to have the highest accuracy and had to meet the demands of the board of weights and measures. Innovation and research over the past 75 years helped VAF to make new types of flowmeters bearing in mind customer requirements and the need for accurate flow measurement. VAF Instruments flowmeters are available in sizes from 8 mm up to 300 mm (1 l/hr up to 960 m³/hr). ProFlow flowmeters cover the middle part of this range.

Available ProFlow flowmeters

ProFlow flowmeters are available in connection sizes from 15 mm up to 50 mm representing maximum flow ranges from 50 l/min up to 500 l/min. For registration of the measured amount of liquid VAF ProFlow meters can be fitted with digital totalisers with or without pulse transmitter.

Liquids

ProFlow flowmeters are specially developed for measurement of all kinds of hydrocarbon liquids, in particular medium and heavy fuel oils for combustion engines, lubricating oils and many other oil-like liquids.

Special versions

This brochure comprises only VAF Instruments standard delivery program. Special flowmeter executions can be offered as tailor-made solutions.

Consult VAF Instruments for further information.

Principle of operation

ProFlow flowmeters operate on the sliding vane principle. The meter consists of a specially shaped housing in which a rotor can rotate freely. Two pairs of vanes are placed into four slots in the rotor. Each pair is positioned by a rod and can move in and out of the rotor. The radial vane movement is guided by the special inner shape of the housing. This patented construction provides a constant seal between the inlet and the outlet of the meter.

The incoming liquid forces the rotor to rotate. An internal magnet transmits the rotor rotations from the measuring chamber to a built-on electronic counter (standard). An electric pulse output can be installed as option for remote totalising or flow data processing.


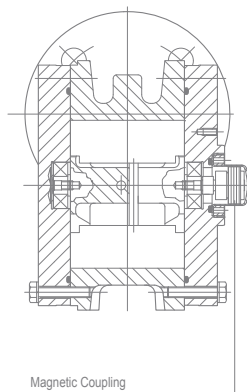


Fig. 1 Sectional view

Features & benefits


| Features | Benefits |
|---|---|
| High capacity and rangeability | One meter for a wide range of flows |
| | Superior turn down ratio |
| | Lower investment |
| High accuracy (down to $\pm 0.2\%$) | Exact registration of transferred amount of liquid |
| | No loss of valuable raw material |
| Design simplicity | Easy to service |
| | No complex replacement parts |
| | Low operation cost |
| Accuracy not degraded by: process pressure / process temperature / liquid viscosity / liquid conductivity / pipe strain / flow pattern (turbulence) | Easy to operate because no need for external settings saving time in operation and training |
| | One single meter model is suitable for different liquids resulting in a lower investment |
| | No straight pipe required before or behind meter thus and less space required |
| Compact design | Easy to integrate in compact systems |
| | Space saving |
| Constructed to CE standards | No special adjustments necessary |
| ISO 9001 registered company | Assured product quality |
| Few internal parts | Less wear |
| | Long lifetime |
| | Low operation cost |
| Measurement driven by liquid | No auxillary power needed |
| | Low pressure drop |
| | Suitable for many remote locations |

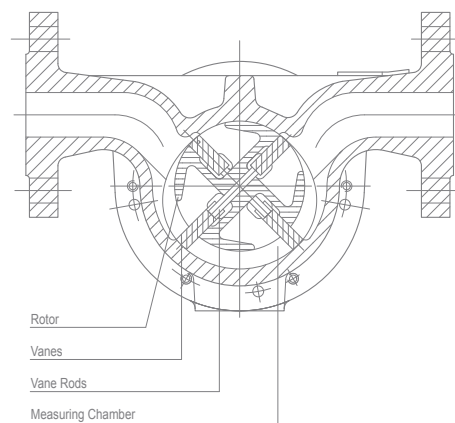

Technical specification

Typical calibration curves

VAF Instruments flowmeters perform liquid measurement with the highest accuracy. This graph shows typical calibration curves for liquids with different viscosities. Consult the factory for other values.

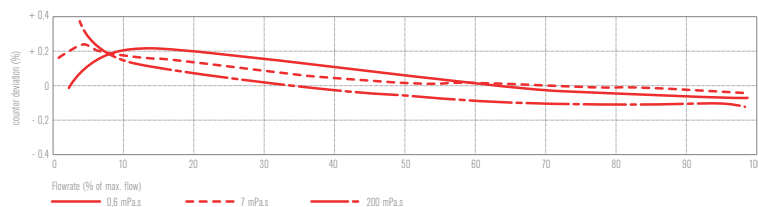


| Basic model number | J5015E | J5023E | J5025E | J5040E | J5050E |
|--|---------------------------------|------------|----------------------|--------------|----------------------|
| Connection size, DN [mm] | 15 mm (1/2") | 25 mm (1") | 25 mm (1") | 40 mm (1.5") | 50 mm (2") |
| Capacity [l/min] | see graphs | | | | |
| Maximum, 8 hrs/day discontinuous | 50 | 50 | 160 | 250 | 500 |
| Maximum, continuous | 37,5 | 37,5 | 120 | 187,5 | 375 |
| Displaced volume per revolution [litre] | 0,025 | 0,025 | 0,167 | 0,167 | 0,40 |
| Measuring accuracy | | | | | |
| range 1:10 ¹ | 0,2 % | | | | |
| range 1:20 ² | 0,3 % | | | | |
| Repeatability | better than ± 0,05 % | | | | |
| Required starting pressure [kPa (bar)] | 3 (0,03) | | | | |
| Materials body, flanges, covers and rotor | ductile iron | | | | |
| Vanes | carbon | | | | |
| O-rings | viton A | | | | |
| Body pressure rating [kPa (bar)] | 4000 (40) | | 2500 (25) | | |
| Available flanges | | | | | |
| DIN PN (bar) raised face or with groove acc. DIN 2512N | 6, 10, 16, 25, 40 | | 6, 10, 16, 25 | | |
| ANSI RF | 150, 300 | | 150, 300 | | |
| JIS K | 5, 10, 16, 20 | | 5, 10, 16, 20 | | |
| Liquid temperature range standard | -10°C to 125°C | | | | -10°C to 125°C |
| On application | -10°C to 180°C | | | | -10°C to 160°C |
| Built-on counter | 7 digit resettable totaliser | | | | |
| smallest readout unit | 0,1 litre, 0,001 m ³ | | 0,001 m ³ | | 0,001 m ³ |
| Optional pulse transmitter | 1 scalable pulse output | | | | |
| Pulse type | open collector NPN | | | | |
| Weight without counter [Kg] | 5 | 7 | 12 | 14 | 22 |

Notes: ¹ Standard factory calibration. ² Calibration on request.


Flow ranges

To select the appropriate meter size for your process the graphs must be used. The data in these graphs only refer to standard flowmeters used on Newtonian liquids. Consult VAF Instruments for viscosities higher than shown in the graphs. Lower minimum capacities are possible dependent on liquid viscosity and required measuring accuracy.

Flowrate - pressure drop viscosity relation

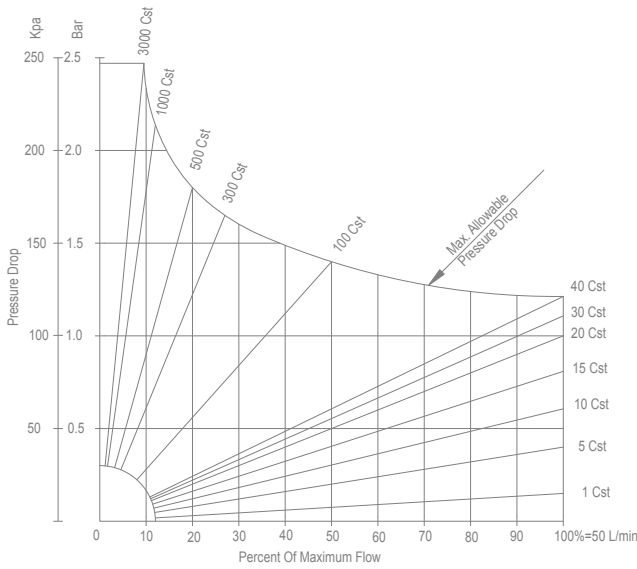


Models J5015E / J5023E: 100% = 50 l/min

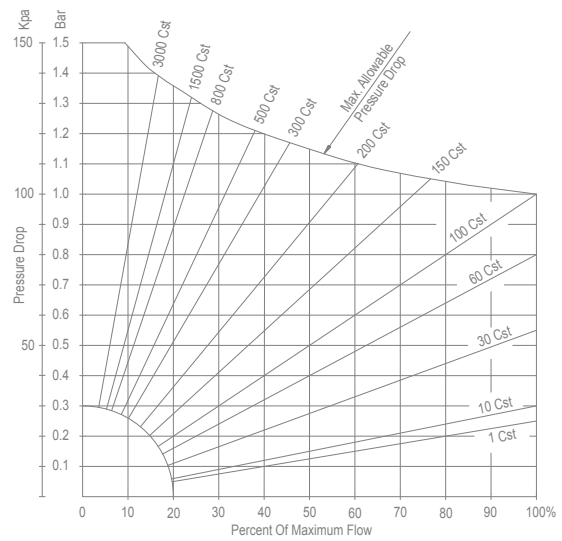

Model J5025E: 100% = 160 l/min

Model J5040E: 100% = 250 l/min

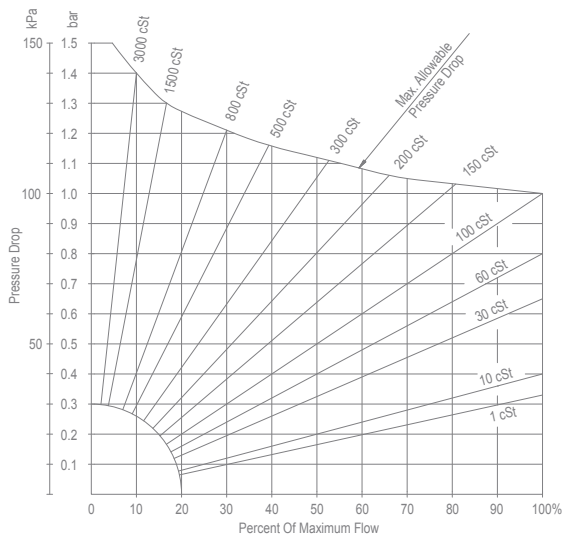

Model J5050E: 100% = 500 l/min



Options and accessories

Liquid filter

The process liquid must be clean and free from air, gas or dirt. Solid particles may cause excessive wear. It is recommended to install a liquid filter with a suitable mesh width. If necessary also install an air vent.

Electronic signal processing instrumentation

A complete range of electronic signal processing instrumentation is available.

Built-on Totaliser

ProFlow flowmeters are equipped with a built-on totaliser. See tables for counter reading units and combinations of totaliser and pulse output.

Consult VAF Instruments for special counters and pulse transmitters not mentioned in this brochure.



Fig. 2 E-counter

Applications


- Fuel consumption measurement of internal combustion engines and oil burners;
- Injection of oils;
- Measurement of fluid movement in hydraulic systems;
- Accurate measurement of viscous fluids at low flow rates.

Dimensions

Dimensions apply to flowmeters with DIN flanges.

Dimensions of flowmeters with other pressure ratings are available on application.

All dimensions are in millimeters.

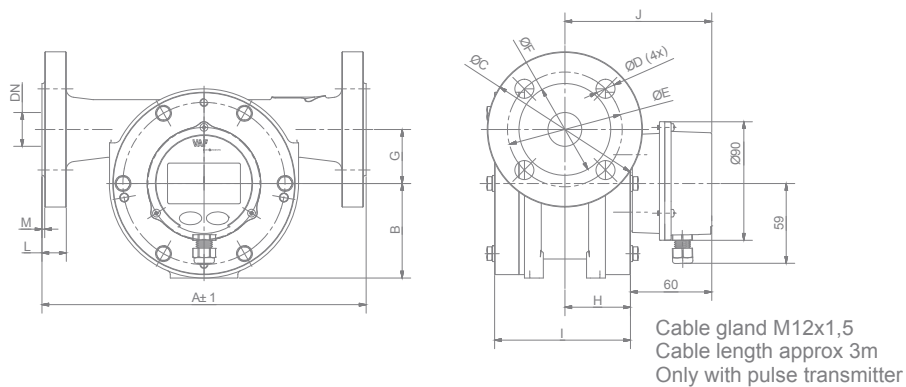

| Meter type | Connection size | A | B | G | H | I | J |
|------------|-----------------|-----|----|----|----|-----|-----|
| J5015E | DN 15 mm (1/2") | 180 | 50 | 24 | 33 | 70 | 93 |
| J5023E | DN 25 mm (1") | 220 | 50 | 24 | 33 | 70 | 93 |
| J5025E | DN 25 mm (1") | 240 | 70 | 40 | 51 | 101 | 110 |
| J5040E | DN 40 mm (1.5") | 240 | 70 | 40 | 51 | 101 | 110 |
| J5050E | DN 50 mm (2") | 260 | 85 | 50 | 72 | 143 | 132 |

Quotation & ordering information

For proper selection of the suitable ProFlow meter the following data should be determined:

Liquid data:

1. **Process liquid** (trade name or chemical composition):
2. **Flowrate** [l/min] minimum: _____ continuous: _____ maximum: _____
3. **Operating pressure range** [bar]: _____ allowable pressure drop [bar]: _____
4. **Operating temperature range** [°C] process liquid: _____ ambient: _____
5. **Specific gravity at operating conditions:** _____ viscosity: _____

Flowmeter data:

6. **Basic model number:** _____
7. **Diameter liquid piping:** _____
8. **Connection flanges:** DIN PN [bar] ANSI RF [lbs] JIS [K]
9. **Direction to flow:** left to right right to left top to bottom bottom to top
10. **Optional pulse transmitter** (see technical specification table):
 required not required
 number of pulse/litre: _____
11. **Liquid filter:** required not required
12. **Special certification:** material certificate according EN 10204 3.1
 standard factory accuracy calibration certificate
13. **Other options and accessories:** _____

All copyrights reserved | Publ. No. PB-142-GB-0414 | Supersedes Publ. No. PB-142-GB-0813

Name: _____

Place and date: _____

For further information see relevant Product Bulletins
or www.vaf.nl

VAF Instruments B.V.

Vierlinghstraat 24, 3316 EL Dordrecht, The Netherlands
 P.O. Box 40, 3300 AA Dordrecht, The Netherlands
 T +31 (0) 78 618 3100, F +31 (0) 78 617 7068
sales@vaf.nl, www.vaf.nl

Specifications subject to change without notice.

Agents and distributors in more than 50 countries.



Where to Buy:



Mackay Marine
 Division of Mackay Communications
 Tel: +1 - 281-479-1515
MarineSales@mackaycomm.com
www.mackaymarine.com